

GB

Operating instructions HEKI 2

1 To open in the tilted position:

- a) Press the knob in the toggle catches on either side of the glass and turn through approx. 90°.
- b) Grasp the metal bar in the middle, snap it out of its holder, swivel down and press the glass dome upwards. (Glass dome is held by the two gas springs after approx. 150 mm).
- c) Swivel the metal bar towards the glass down and snap into its holder.

To close the glass dome, proceed with steps (a - c) in reverse order.

2 To open in the intermediate position

- a) Open the toggle catches on either side of the glass (see 1 a).
- b) Grasp the metal bar in the middle, snap it out of its holder, swivel down and press the glass dome outwards. (Glass dome is opened automatically after approx. 150 mm by the two gas springs).
- c) Open both fasteners and swivel the metal strap toward the intermediate position (fastener fig.), and pull the glass dome down until the metal strap is stopped by the fasteners.
- d) Safeguard the metal strap with both fasteners.

To close HEKI 2, proceed with steps (a - d) in reverse order.

3 To open in the ventilation position

- a) Open the toggle catches on either side of the glass (see 1 a).
- b) Using both hands on the two toggle catches, press the glass dome up about 2 cm and fasten the toggle catches in the corresponding setting.

To close HEKI 2, proceed with steps (a - b) in reverse order.

4 Closing the blinds

- a) To close the blinds, take hold of the end rod (without rocker) in the recessed grip and engage in the opposite end rod (with rocker).

Caution!!

In extremely bright sunshine, the black-out blind must only be closed two-thirds, and the pane must be set in the „continuous airing“ position.

- b) Select the required position (black-out / fly screen) by moving both joined end rods together.

5 Opening the blinds





- a) Move blind (end rod with rocker) right to the outside (see diagram).
- b) Hold the recessed grip with one hand; with the other hand, press the rocker and move the blind back (do not let it recoil).

- Do not stand on the acrylic glass dome.
- Close HEKI 2 completely before moving off.
- Do not leave your vehicle when HEKI 2 is open.
- Please consult your local dealer if you have any problems or defects.
- Remove any snow/ice or dirt before opening the roof.
- Do not open when it rains or when there is a strong wind.


Care instructions:

Clean the acrylic glass pane with soap suds and plenty of water, or use the SEITZ special cleaner. Only use water and mild soap suds to clean the blinds.

The guarantee becomes null and void if these instructions are not followed.

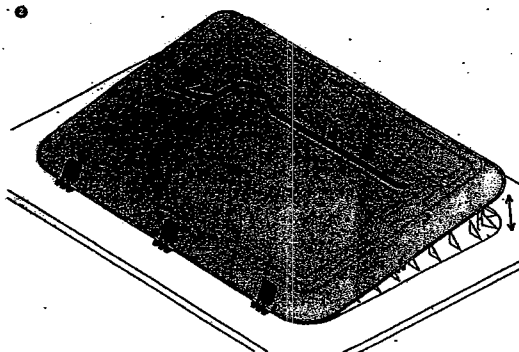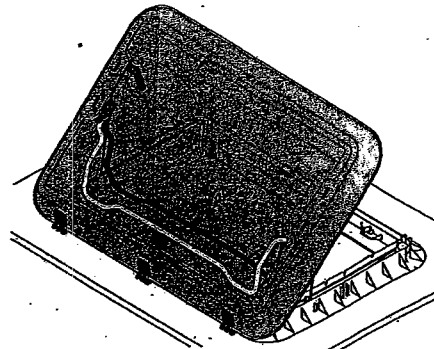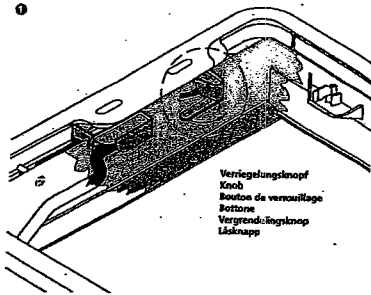

Position für Durchlüftung
Ventilation position
Position pour aération continue
Posizione per ventilazione continua
Positie voor ventilatie
Den kontinuierliche Ventilationslage

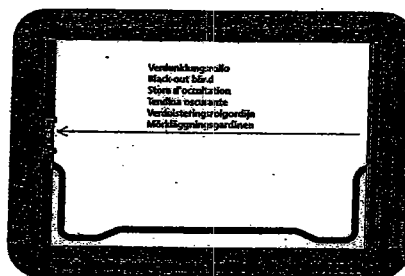

MO 1034 700202

